
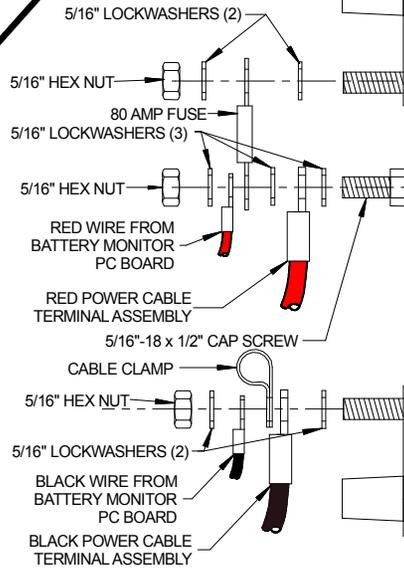
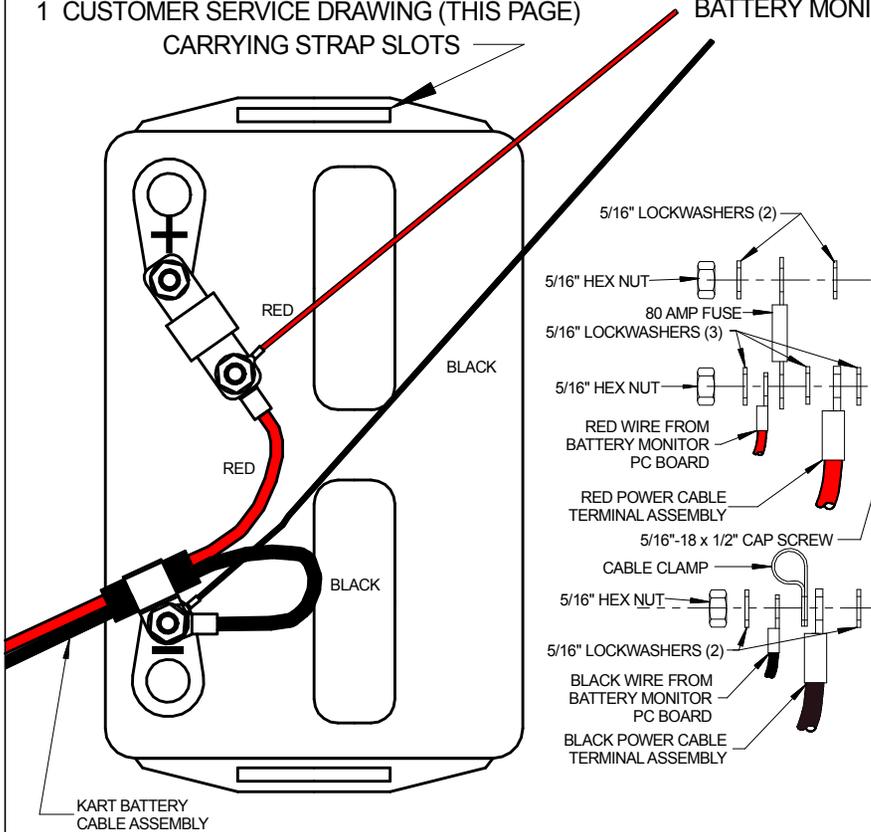


PARTS LIST:

- 1 PREASSEMBLED BATTERY CABLE
- 1 BATTERY BOX WITH COVER & MONITOR ASSEMBLY
- 1 80 AMP INLINE FUSE
- 1 5/16" X 1/2" CAP SCREW
- 3 5/16" HEX NUTS
- 7 5/16" EXTERNAL TOOTH LOCKWASHERS
- 1 CUSHIONED CABLE CLAMP
- 1 BLACK NYLON CARRYING STRAP
- 1 CUSTOMER SERVICE DRAWING (THIS PAGE)

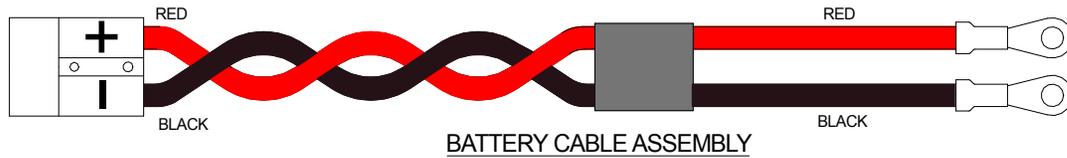



CAUTION!
 CONNECT BLACK WIRE TO
 NEGATIVE (-) TERMINAL AND
 RED WIRE TO POSITIVE (+)
 TERMINAL.

ASSEMBLE PARTS IN THE
 SEQUENCE SHOWN.

THE BATTERY CARRYING STRAPS PASS
 THROUGH THESE HOLES IN THE COVER.



BATTERY BOX WITH MONITOR

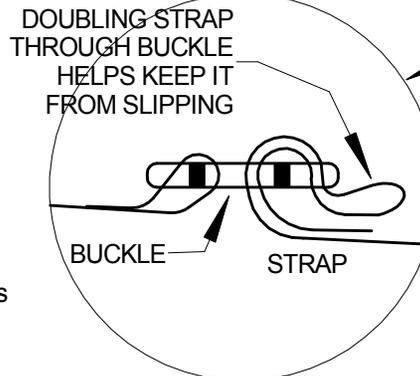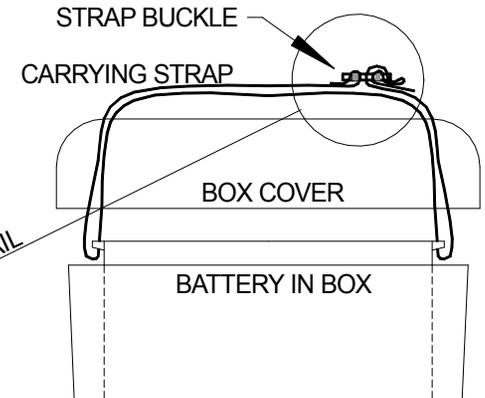

KIT ASSEMBLY INSTRUCTIONS: USE EXTREME CAUTION!

1. Route the battery cable to your battery terminals approximately as shown.
2. **BE SURE** the black wire goes to the negative (-) battery terminal and the red wire with fuse connects to the positive (+) terminal.
3. Assemble the battery cable to the battery using the included hardware in the order shown. Take special care in the placement of lock washers.
4. Connect the red & black wires from the battery monitor to the battery as shown; red to positive (+) and black to negative (-). The red wire connects to the "outside" of the 80 Amp fuse with the large red power cable.
4. Double check your assembly and then tighten all hardware securely.
5. Follow the instructions shown to install the battery carrying strap.

<i>CUSTOMER SERVICE DRAWING</i>	
TITLE KART BATTERY BOX AND CABLE KIT	
DATE DRAWN 2/16/05	PART NUMBER 01NKA-1025-A
DRAWN BY jrn	REVISION C
APPROVED BY kjm	SERVICE DRAWING NUMBER #SERV-0000